
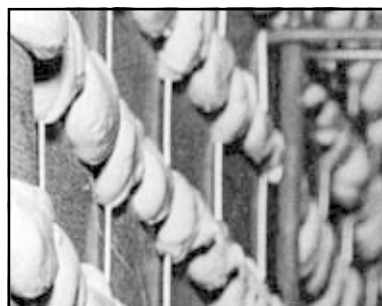


1. Stucanet®

1. Description of the product


Stucanet® is a lath made from a galvanised welded wire mesh into which an absorbent sheet of perforated chip paper is interwoven. The perforations in the chip paper allow an optimal key of the mortar around the galvanised wires.

Stucanet® is well suited for all plastering, using either with lime-cement mortars or cement-mortars. When applying **Stucanet®** on outside walls, it is also possible to use lime-sand-cement mortars.

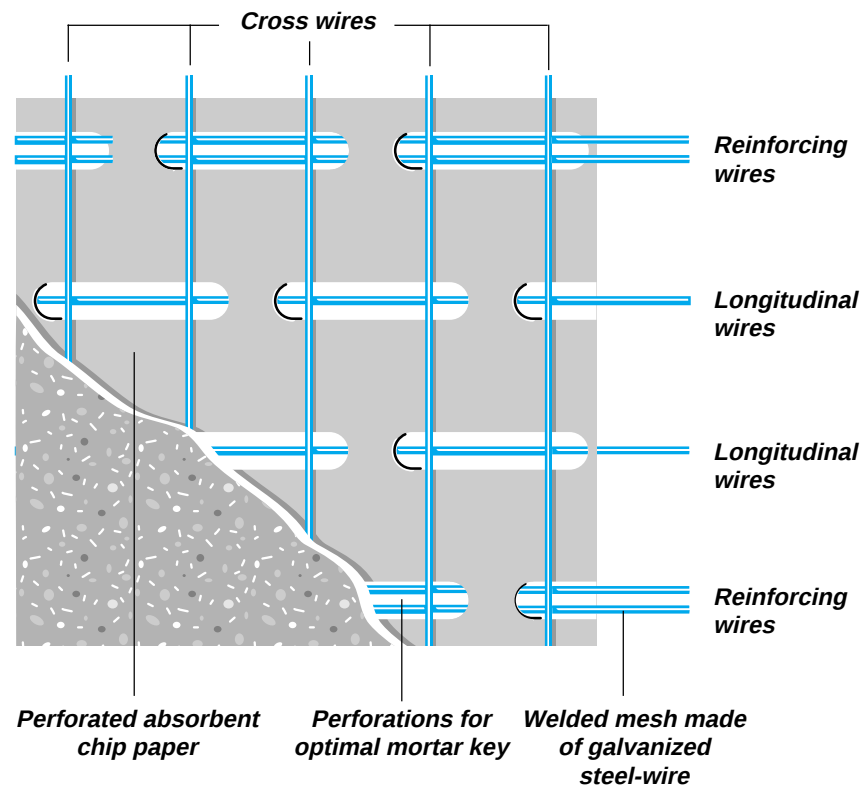

Stucanet®


- ✓ Very light and strong
- ✓ Easy to shape
- ✓ Easy to fix on to any kind of support




2. different types

✓ for internal and external plastering:


Stucanet®
33

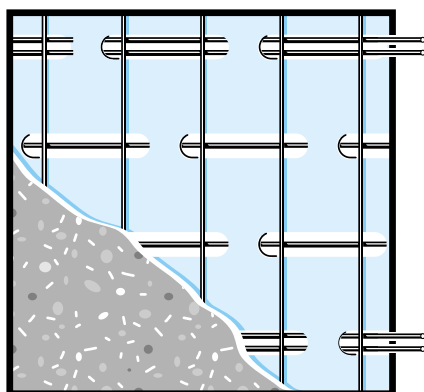


2 parallel wires for fixing

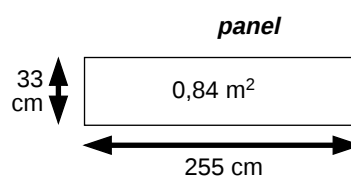


Stucanet®
S

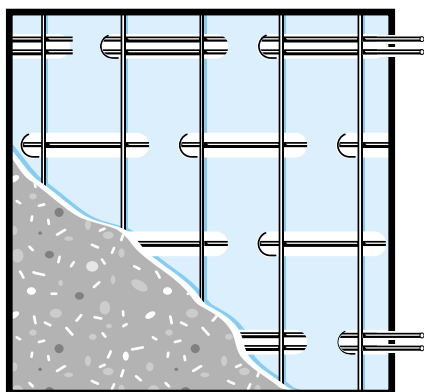


2 parallel wires for fixing




Stucanet®
80

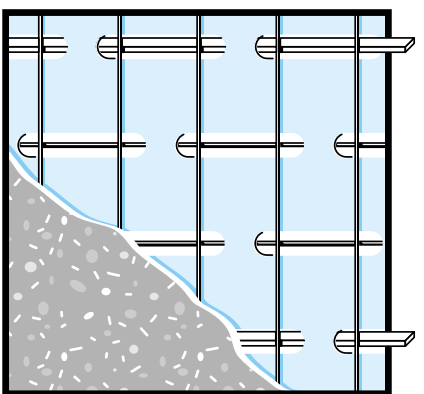


Flat wire for fixing






- ✓ **for applications on external walls and total constructions**
 it is recommended to use **Stucanet® S-H**. In order to prevent water penetration, this type of **Stucanet®** is supplied with waterproof bitumen-paper.

Stucanet®
S-H

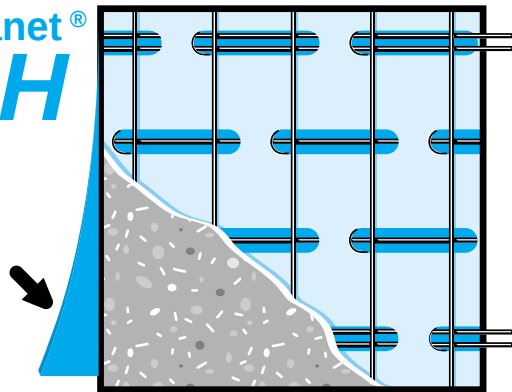

with waterproof bitumen paper




* Upon request, **Stucanet®** is also available in **stainless steel** (AISI 304).

3. Technical data

3.1. Wires:

Stucanet®	33	S	80	S-H Bitumen
Longitudinal and cross wires	 1,50 mm	 1,50 mm	 1,50 mm	 1,50 mm
Reinforcing wires	 2,00 mm	 2,00 mm	 6,00 x 2,00 mm	 2,00 mm
Number of reinforcing wires	—	—	5	-
Meshes (mm)	38 x 50	38 x 50	38 x 50	38 x 50
Sidemeshes (mm)	38 x 27	38 x 27	38 x 27	38 x 27
Tensile strength - N/mm ²	for all types			: min. 350 N/mm ²
Zinc coating- gr/m ²	diameter 1,50 en 2,00 mm			: min 60 g/m ²
	diameter 6 x 2 mm			: min 50 g/m ²



3.2. Panel:

Stucanet®	33	S	80	S-H Bitume
panel (m)	2.55 x 0.33	2.4 x 0.7	2.4 x 0.7	2.4 x 0.7
m ² /panel	0.84	1.68	1.68	1.68
kg/panel	0.80	1.78	2.5	2.05
kg/m ²	0.57	1.06	1.47	1.22
packing: panels per bundle	15	15	15	10
printing		gray	gray	gray

Weight cardboard: all types min. 300 gr/m²

4. Fixing Stucanet®: some advice

